

SPEEDWAY SEDANS AUSTRALIA INC

SSA Class Technical Manual

Rules and Regulations

Modified Sedans – Production Sedans - Street Stocks – Junior Sedans - National 4



ONLINE – VERSION 11 – JULY 2020

The content of this manual is to be read in conjunction with the SSA Class Specification Manuals available as a separate download. [Click Here](#)

SSA MONO CLASS TECHNICAL SPECIFICATIONS

Applicable to SSA Modified Sedans, SSA Production Sedans, SSA Street Stocks, SSA National 4 and SSA Junior Sedans

TABLE OF CONTENTS

SECTION 1 – POLICY, PROCEDURES and DEFINITIONS

1.	INTERPRETATION.....	2
2.	GENERAL	2
3.	REGISTRATION / RACE DAY REQUIREMENTS	3
4.	DECLARATION OF COMPLIANCE	4
5.	MEASURING OF CARS.....	4
6.	PENALTIES.....	5
7.	AUTHORITY TO EXCLUDE	5
8.	SPECIFICATION MANUALS	5

SECTION 2 – PERSONAL SAFETY EQUIPMENT

9.	DRIVER SAFETY.....	5
10.	PROTECTIVE CLOTHING	6
11.	SEAT BELTS	6
12.	INSTALLATION OF DRIVER RESTRAINT SYSTEMS.....	7
13.	ADJUSTMENT OF DRIVER RESTRAINTS	8
14.	WINDOW NET and FITMENT.....	9
15.	PADDING	10
16.	FIRE EXTINGUISHER	10
17.	SEAT	10

SECTION 3 – Construction and SSA General Rulings

18.	PRESENTATION	13
19.	CONSTRUCTION	13
20.	SSA GENERAL RULINGS	14
	a. Transponders.....	14
	b. One-way Communicators.....	14
	c. Engine Sealing.....	14
	d. Dual Registration.....	14

Summary of Updates.....	14
-------------------------	----

Speedway Sedans Australia Inc
P.O. Box 163
HOLDEN HILL SA 5088

Enquiries to your State Technical Representative or

Email: technical@speedwaysedans.com

Website – www.speedwaysedans.com

Link to Technical Specifications – [Click Here](#)



SECTION 1 – POLICY, PROCEDURES and DEFINITIONS

1. INTERPRETATION

Speedway Sedans Australia Inc. (SSA Inc.) shall be the sole authority for the interpretation of, and compliance auditor for, these specifications, referred to from here as ‘these specifications’. At any Race Meeting, this authority is delegated to the Head Technical person. (01/07/16)

The SSA Inc National Technical Committee is inclusive of a Technical Representative from each state and the CTAC Chairperson for each class. (01/07/16)

The Role of the SSA Inc. National Technical Committee is to continually monitor all facets of construction, safety, maintenance, competition and upgrading and not to preclude any competitor regardless of financial status. (01/07/2020)

To solicit Policy items from competitors, car owners, clubs, states/territory, promoters and other people interested in the betterment of Speedway Sedan racing. (01/07/2020)

The Class Technical Advisory Committees (CTAC) is a subcommittee of Speedway Sedans Australia Inc and is responsible directly to the SSA Inc board.

The role of the CTAC is to formulate a specification manual and provide clarification of rulings for the competitors and officials.

Amendments to this specification manual may be made during the life of this manual for the reasons as set down in SSA Inc. Policy governing such amendments. Recommendations for an amendment will be submitted by the CTAC for submission to the SSA Inc. Board for approval.

Amendments approved by the SSA Inc will be circularized to all clubs, competitors and be displayed on the SSA Inc website.

All technical enquiries must be directed through your Club Scrutineer, State Technical Delegate, State CTAC delegate and/or your State Office.

SSA Inc. vehicles must only compete with SSA Inc. registered vehicles and registered in the same class with drivers who hold an SSA Inc. / Speedway Australia licence and SSA Inc. approved insurance for the appropriate class. (01/07/2020)

2. GENERAL

All new and existing cars must comply with all specifications as detailed. If “IT” is not in the book, it will be considered non-compliant until written approval for use is issued by SSA Inc after approval through the CTAC and Technical Committee and ratified by the SSA Inc. Board. (01/07/2020)

Prior to constructing a car not listed in the tables at the rear of the class specification manual full details will be submitted to the Class CTAC Representative who will forward to Class CTAC Chairperson. Submissions will be handled in a confidential manner. Approval, or required modification before approval, will be given in writing to the applicant. An administration fee of up to \$250 will apply for unusual or unconventional design vehicles. (01/07/18)



Once approved the approved vehicle will be included in the Class Specification Manual and the opportunity will be available for any competitor to build the same vehicle. (01/07/17)

There is a specific form to be completed – Application for Additional Make/Model Not Currently listed - please refer to specific class specification technical pages. [Click Here](#) (01/07/18)

3. REGISTRATION / RACE DAY REQUIREMENTS

3.1 Registration (01/07/2020)

- a) A complete metal body shell including roll cage is the basis for the registration of a race car.
- b) Application for registration of an SSA Inc Vehicle cannot be made by a person under the age of 18 years.
- c) An SSA Inc. registration shall only be issued subject to the car conforming to all specifications detailed in the SSA Inc. Specification Manual for the class in which the car is to be registered.
- d) The car must pass a daylight inspection on an annual basis to confirm compliance.
- e) The annual Daylight Inspection for year of registration must be carried out by an independent registered SSA Inc official - not be completed by the car owner or the car builder/constructor.
- f) A car being re-registered must have the log book from the immediate previous season. A car being re-registered that was not registered in the immediate previous season and therefore had no log book issued for that year of registration must provide validation of the cars previous registration, regardless of age; otherwise the chassis area and the roll cage will be subject to new car specifications as per all current specification manuals.
- g) For registration purposes - Dual registered cars must supply 2 Daylight Sheets (1 for each class) and 1 Engine Sealing Sheet. Dual registration is accepted for any car which complies with the full specification and is an approved model for the class registration is being sought.
- h) An additional Daylight Inspection must be completed by a registered SSA Inc Machine Examiner/Scrutineer and be placed in the Log Book following any structural repairs to roll cage during the period of registration or as directed by a registered SSA Inc Machine Examiner/Scrutineer.
- i) An additional Daylight Inspection must be completed by a registered SSA Inc. Machine Examiner/Scrutineer and also placed in the Log Book when a car has been re-shelled during a registration period. Re-shelling of a race car means that the same make and model of car currently registered is used. No additional registration fees being applicable during current registration period.
- j) Roll cages being transferred to a new car (different model) must fully comply with all current specification and will be deemed as a new car registration.
- k) For pre-registration purposes Daylight Inspection sheets are valid for 90 days.
- l) A new registration decal will be issued annually and must be attached to a prominent/protected location on the car.



a. Race Day Requirements (01/07/2020)

- a) The log book must be endorsed by an SSA Inc registered/Machine Examiner/Scrutineer at each meeting prior to competing. A log book without endorsement by the SSA Inc Machine Examiner/Scrutineer is equivalent of a no participation ticket.
- b) Race Day Scrutineering – A competitor/owner of a car taking part in the race meeting must not scrutineer or sign off the log book for his/her own race car. (01/07/17)
- c) Race Day Work Orders – Maximum work order at ANY race meeting, either Club, State or National to be 7 days or next participation in competition – or whichever comes first. 7 Day work orders to be issued only for non-safety and non-performance items.
- d) A copy of the Daylight Sheet for current year of registration and Engine Seal forms corresponding to all seals on the engine being used and fitted to car to be stapled into the back of the log book.
- e) EFI Junior Sedans and EFI Street Stocks will have an ECU Sealing Sheet with the Log Book. (01/07/16)

4. DECLARATION OF COMPLIANCE

The Owner of the car shall complete an SSA Inc. DECLARATION OF COMPLIANCE annually.

Compliance Declaration will include:

- a) SAFETY- compliance with all safety requirements
- b) ELIGIBILITY- Compliance with all manufacturing specifications
- c) ENGINE- Compliance with class engine specifications

It is the responsibility of the Owner/Driver to complete pages 2 to 4 of the Log Book, ensuring that the Declaration of Compliance (page.3) has been completed before participation in any official practice session or race meeting. SSA Inc. Registration will be deemed void until such time the Log Book, pages 2 to 4 have been correctly completed. (01/07/2020)

5. MEASURING OF CARS

All cars are subject to engine checking and general measurement at any time by a duly registered SSA Inc Machine Examiner/Scrutineer, the National Technical Committee and the SSA Inc Steward of the race meeting or the Racing Disputes Committee.

The SSA Inc. reserves the right to impound and inspect any race car at any time; this may include the removal of any engine seals for inspection and including the downloading of any information via relevant means if applicable.

Cars can be selected at random and ordered to the impound area for dismantling.

The Owner/Driver of the car must deliver selected vehicle immediately upon request and supply the necessary manpower and hand tools to accomplish dismantling. Only persons actually involved in dismantling the car will be allowed in the immediate area of the vehicle being inspected. Any persons not having cars in the impounded area, and gaining entry without authorisation, will be ejected. If there are no facilities available to check any parts of a vehicle, sealing of parts under question can be carried out and vehicle taken to a mutually agreed venue for examination at another time, but within fourteen (14) days.



Impounded cars will be stored at owner's risk. Although every reasonable precaution will be taken, no responsibility for fire, theft or damage will be assumed by the SSA Inc. and/or affiliated states and clubs. (01/07/2020)

6. PENALTIES

The Specification Manual must be read in conjunction with the current Australian Speedway Racing Rules and Regulations and/or notices issued by the SSA Inc. from time to time. Ignorance of these Regulations and Specifications and notices shall be deemed as no defence in regard to breaches and/or appeals.

7. AUTHORITY TO EXCLUDE

If an SSA Inc Official, including a duly registered SSA Inc Machine Examiner/Scrutineer, the National Technical Committee, SSA Inc Steward of the race meeting, or the Racing Disputes Committee determines prior to or during the race meeting that the Race Car does not meet the applicable specifications, the car will not be allowed to compete unless, at the discretion of the official, the deficiency:-

- a. will not adversely affect the orderly conduct of the race.
- b. will not provide the competitor with a significant competitive advantage over other competitors.
- c. is so insubstantial as not to warrant a determination that the car is ineligible to race.

If the car is permitted to compete under these circumstances, the SSA Inc Official will advise the competitor in writing by way of entry in the Log Book belonging to the car of the non-compliance and the timeframe for correction of the non-compliance. If the non-compliance has not been corrected within the specified timeframe, the car will be prohibited from competing in any future event. (01/07/2020)

8. SPECIFICATION MANUALS

The specification manual will be an online electronic document.

Specification manuals can be downloaded from the SSA Inc. website [Click here](#)

Any future updates and specification changes approved will be uploaded as required to the relevant specification manuals. (01/07/2020)

SECTION 2 – PERSONAL SAFETY EQUIPMENT

9. DRIVER SAFETY

- a) All protective clothing and safety equipment must be used and/or worn in the approved and accepted manner whilst competing, or testing and/or practice.
- b) All race wear / equipment shall be inspected at each practice and/or race meeting. Non-compliant safety equipment will be confiscated and stored by Club/State where the event is being held for the duration of the meeting – if items withheld are not claimed at the completion of the meeting they will be deemed to be disposed of after 7 days. (01/07/2020)



10. PROTECTIVE CLOTHING

All protective clothing shall comply with minimum standards for Safety Apparel as specified in the current Speedway Australia Racing Rules and Regulations [Click here](#) and/or notices issued by the SSA Inc. from time to time for safety standards pertaining to a class or class. (16/09/17)

11. SEAT BELTS

An approved type racing harness must be fitted, using a minimum of four major belts and four mounting points, plus one or two anti-submarine/crotch straps.

- a) Shoulder and Hip Belt width 50mm minimum, 75mm highly recommended.
- b) Only belts with over centre lever lock buckle to be used.
- c) **SEAT BELT LIFE IS A MAXIMUM OF TWO YEARS FROM DATE OF MANUFACTURE or as per expiry date noted on the attached SFI tag. (14/09/19)**
- d) Shoulder belts are to have separate anchor points/adjusters.
- e) Shoulder belt mounting points shall be positioned to the rear and below the point at which the shoulder belts come through the seat and be not more than 300mm from that point, attached to **38x3mm CHS or 38x2.6mm CHS (CDS)**. Anchor bolts shall be 10mm steel minimum. See Fig 2 (01/07/2020)
- f) Lower seat belt mounting brackets (anchor points) must mount to roll cage and chassis or substantial bar work using a minimum construction of **25x25x3mm RHS or 25x3mm CHS or 32x32x2.5 RHS or 38x2.6mm CHS (CDS)**. Seat belt attachment tag shall be 3mm minimum mild steel. Anchor bolts shall be 10mm steel minimum. (01/07/20)
- g) Seat belt mounting tabs to be one of the following options:
 - Option 1 – if one flat piece is being used must be minimum 50x50mm x 3mm minimum thickness and fully welded on both sides
 - Option 2 – 40x40xmm x 3mm minimum thickness also acceptable if RHS is used making tab 3 sided. Sides to be minimum 20mm.
 - Option 3 – Bent tabs also acceptable 40x40mm x 3mm minimum thickness with 20mm long angles minimum.
 - Option 4 – If one flat trapezoid tag is used; must be as per diagram – measurements to be minimum 55x35x25mm x 5mm. To be welded on both sides of the longest side. (01/07/18)
 - Option 5 – If using 'wrap around' method of mounting seat belts they MUST be mounted so that the belt cannot slide along the mounting bar. (01/07/18)

If using option 2 or 3 the tags, must be welded on one side of the entire bracket assembly, as per attached photo.

No holes for lightening or dual mounts for belts. (16/09/17)



SFI Labels Prior to 2017



SFI Labels Available Jan. 1, 2017

Sample SFI tags




Option 2 - RHS Seat Belt Mounting Tag



Option 3 – 40x40x3mm x 3mm Bent Tabs




Option 4 – 55x35x25mm x 5mm Trapezoid

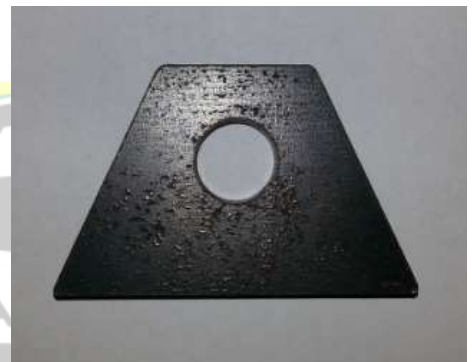

- h) Seat belt mountings to be relevant to position of seat – this is particularly important when moving a seat to suit the driver. (01/07/17)
- i) Seat belt anchor bolts shall be 10mm minimum high tensile steel. (01/07/18)

Fig. 2

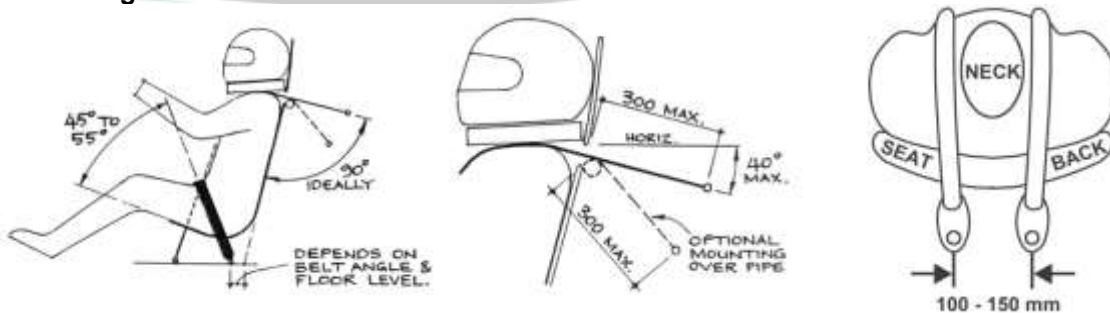

12. INSTALLATION OF DRIVER RESTRAINT SYSTEMS

The mounting points must be solid and should remain so even if the vehicle is deformed due to an accident. The mounting points should also not put undue strain or twist on the belt system hardware. The lap belt should be positioned so it rides across the solid pelvic area and not the soft stomach area or down on the thighs. The shock absorbing ability of the pelvic area and its ability to protect internal organs make it the preferred location for the lap belt. See Fig 3 (i) & (iii).

The shoulder harness should be mounted to prevent driver's shoulders from moving forward (upward if semi-reclining), out of the seat, in the event of a rollover.



Anti-submarine straps serve two purposes;

1. To secure the lap strap down across the driver's hips, so in the event of an accident, it is not pulled up across the stomach by the shoulder straps.
2. To prevent the driver from sliding forward and out of the harness. When the driver is seated in an upright position, as in most sedans, a five-point system (a single anti-submarine or crotch strap) is considered adequate (Fig3 ii). For extra assurance a double strap anti-submarine belt can be used. (Fig 3 iv)


When the driver is seated in a semi-reclining position a six-point system (two anti-submarine or crotch straps) is preferable. Most drivers find the two anti-submarine strap system more comfortable. In many instances, the anti-submarine straps are mounted much too far forward of the seat. This practice could cause unnecessary injury as the body can slide partially out of the seat before being restrained when the strap contacts the groin. It is much more practical to cut a slot in the seat bottom so the anti-submarine strap can be anchored in line with the chest. (Fig 3 i)

Because of the differences (often vast) in competition vehicles, a 'standard' method of mounting is impractical. Good judgement and common sense in inspecting restraint system mounts is needed. Safety equipment is often neglected in favour of performance equipment, but its proper operation when the need arises is essential to survival.

Fig. 3(i)

Lapbelt should be installed at an angle, 45-55 degrees to the tangent line of the thigh.

45° to 55°



Crotch strap should be anchored in-line with the chest.

Fig. 3(ii)

Horizontal
40 deg Mounting Zone



5 Point System


Seat belts should be anchored apart the same distance as the driver is wide. Mounting brackets should be angled the same distance as the belts pull and not tilted in or out.

Mount shoulder harness to rollbar 100mm below shoulder



Shoulder harness should be anchored at a 45° degree angle from the seat. If mounted to the rollbar cross brace, it should be located 100mm below the shoulder line.

Fig. 3(iii)

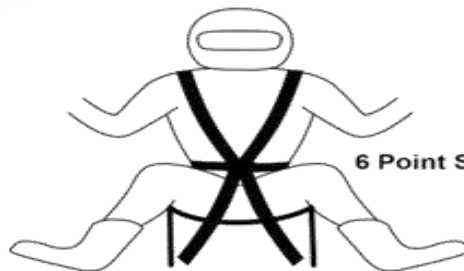

6 Point System

Crotch strap mounts as far apart as comfortable

Fig. 3(iv)

13. ADJUSTMENT OF DRIVER RESTRAINTS

With the driver fully kitted out in 'underwear and driving suit', check that, with the driver seated, belt slots in the seat line up with natural line of the belt from anchor to buckle when just the lap belt is tensioned. Ensure that the lap adjusters do not foul the seat and that they are readily accessible. Some belts adjust



by pressure downward others by pull up. Check that the driver can manipulate belt adjusters with gloves ON.

Also check that anchor hardware is aligned and that it is not possible to have a hitch in the anchor area without detection (sudden release of the belts to 50mm slack can put the driver off-line). Also check if the belt is holding the seat or the driver, it should be the latter.

Adjust the anti-submarine strap/s to ensure that the buckle is held flat and close to the body over the pelvis. When satisfied that the lap belt is OK, put on the helmet and check just how far the helmet (with visor) can reach, head plate clearance, helmet/window net etc. Slacken the seat belt, engage the shoulder belts into the buckle and tension the seat belts again, checking position of the buckle and adjusters. Tension each shoulder belt, checking that the adjustment range is suitable to the driver, that the belts and hardware don't foul the seat and that the natural line of the belts holds the driver as with the lap belts.

Note also any change in the buckle location and lay. If there is too much variation with the buckle it would appear that lap anchors are not in optimum position.

Before the driver releases the buckle, he should slacken both shoulder belts with the adjusters, in order to make re-entry to the car and refitting of the seatbelts as simple as possible.

14. WINDOW NET

- (a) Window Net is mandatory.
- (b) Window net to be in good condition. (01/07/18)
- (c) Window Net to be a minimum approved SFI standard of 27.1
- (d) Window nets with SFI rating that have manufacture dates be replaced every two years. (14/09/19)
- (e) Window nets with SFI rating that have an expiry date be enforced and replaced according to expiry date. (01/07/2020)
- (f) As from 01/07/2023 SFI rated window nets with expiry/end date are mandatory. (14/09/19)
- (g) FIA J253.11 window nets are acceptable and must meet the FIA standard/requirements. There is no expiry date applicable. In this instance Item b) applies. (01/07/2020)



SFI Labels Prior to 2017




SFI Labels Available Jan. 1, 2017

Sample SFI tags

WINDOW NET FITMENT

- a) Window Net minimum rod thickness 1/4" (6mm).
- b) The window net shall be hinged from the bottom and shall be fixed/fastened at the top via a 6mm rod threaded through the cavity provided. The rod shall be secured with lock pins or a central spring-loaded pin.
- c) Window net shall be secured to the roof hoop bar and top NASCAR door bar. Quick release seat belt type attachments are also permitted.
- d) Window net to be completely removable without the use of tools. (01/07/2020)

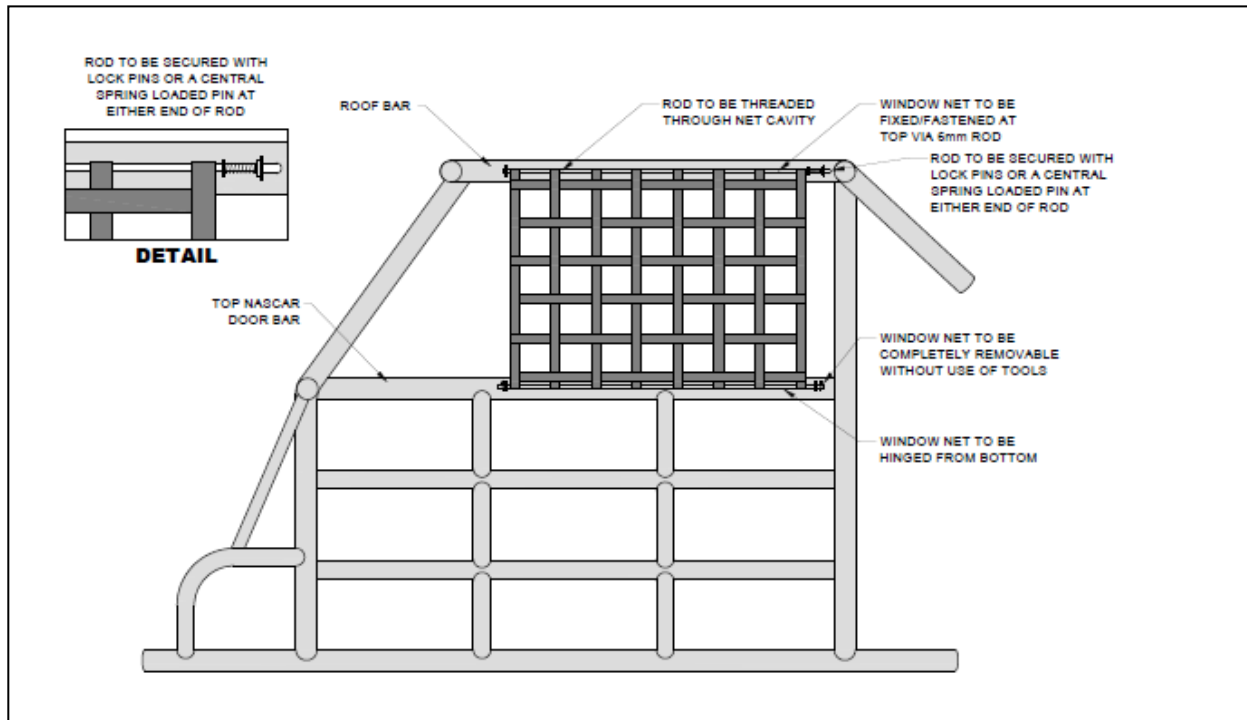

15. PADDING

Padding may be used to protect driver from injury in the event of an accident. Cars shall be manufactured to minimise driver contact with sharp edges, projections, or bar work in the cabin area.

16. FIRE EXTINGUISHER


An on-board fire extinguisher of the correct type is permitted. It must be securely mounted and suitable for the fuel being used.

17. SEAT

A purpose/ proprietary one-piece steel, aluminium, fibreglass or carbon fibre bucket type seat incorporating a substantial head rest shall be used. If the seat used cannot be mounted as per this specification then the seat is not able to be used – seat must not be altered. (01/07/18)





- a) Aluminium seats shall be constructed of a minimum 3mm material thickness.
- b) Steel seats shall be a minimum 2mm material thickness.
- c) Proprietary aluminium full containment seats shall be a minimum 2.5mm material thickness.
- d) Proprietary carbon fibre competition seats must use manufacturers mounting kits when supplied.
- e) Seats include Kirkey, Butler, Ultra Shield, United Speedway Accessories, Bratpac and Racetech. (14/09/19)
- f) Magnesium seats not permitted.
- g) Seat design shall provide Lateral (sideways) support to hips and chest.
- h) The driver shall have a minimum 50mm clearance between the helmet and any part of the head plate and roll cage when seated.
- i) Top of the headrest to be at least 50mm above helmet contact point, headrest must be padded. At the discretion of the scrutineer the headrest will need a form of support if it is deemed too flexible and/or the area between the seat and roll cage is too great.


- j) As a minimum the seat shall support the drivers back to the top and full width of the shoulders. Seat back is to be braced and attached to the roll cage approx. 75mm below shoulder height using a minimum of 2 x 8mm bolts and 40mm minimum body washers. (14/09/19)
- k) All seats may be padded and covered. The covering shall be securely attached. Maximum padding thickness is 50mm.
- l) Seat frame **must** be fully mounted to the roll cage in a minimum of 3 points, preferably 4. Seat frame to be a minimum material size 25x25x3mm RHS or 25x3mm CHS. (01/07/2020)
- m) The seat is to be mounted completely on the right-hand side of the vehicle centreline.
- n) The seat base is to be mounted to roll cage seat base frame using a minimum of 2 x 8mm bolts and 40mm minimum body washers. Base of the seat is defined as the lower side of the seat and under the seat. Lower seat sides or seat base can be used for mounting purposes. (14/09/19)
 - Flat Steel body washers are permitted.
 - Aluminium tapered seat body washers are permitted (see picture below)
 - Proprietary seat manufacturer mounting kits are permitted.
 - Plastic / nylon tapered seat body washers are NOT permitted. (14/09/19)

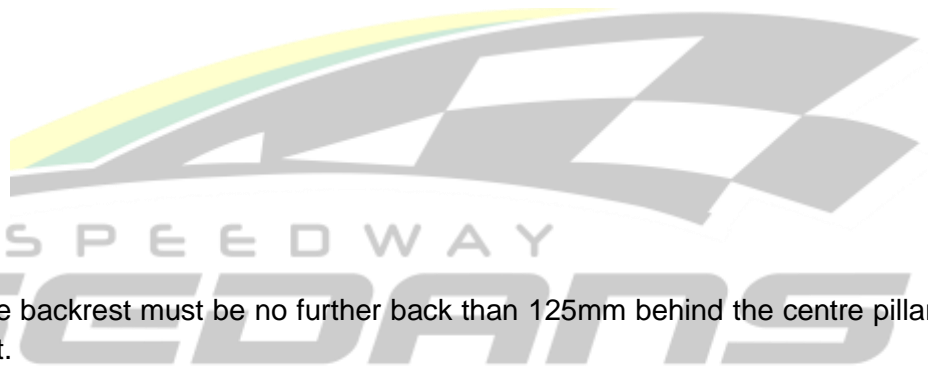


- (i) 4 DOOR CARS. The rear of the backrest must be no further back than 125mm behind the centre pillar, measured at window seal height.
Modified Sedan – Mazda RX8 – the rear of backrest must be no further back than 1140mm behind the A-Pillar measured at window sill height. (16/11/19)
- (ii) 2 DOOR CARS. The rear of the backrest must be no further back than rear of centre pillar, measured at window sill height.

*Points (i and ii) do not apply to National 4.

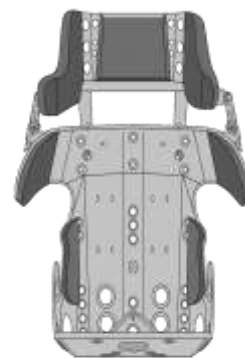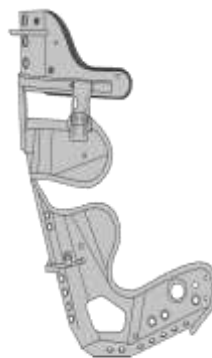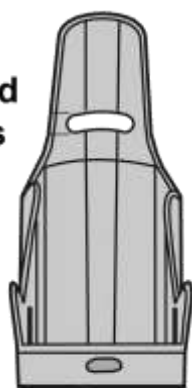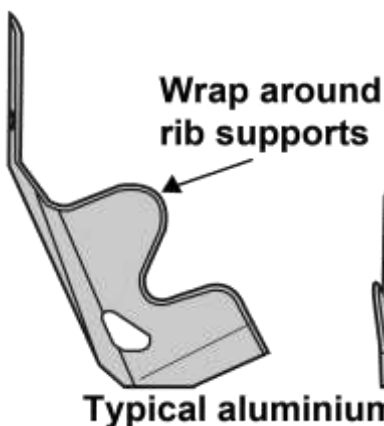

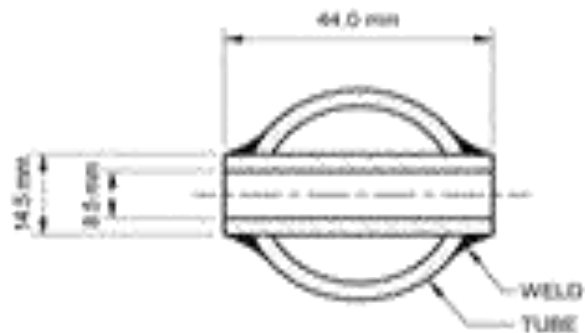

SEAT MOUNTING SLEEVE DETAIL

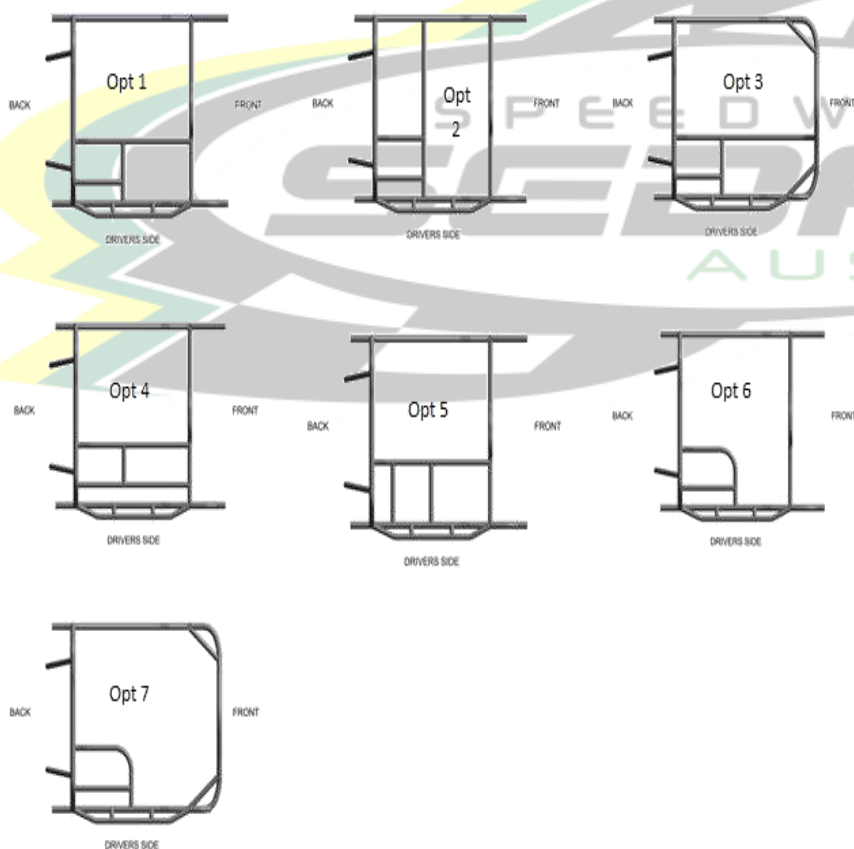

The above mounting methods are highly recommended to be used in ALL new cars built and registered post 1 July 2019 regardless of the roll cage design used. Please refer to Section 2 and 2a in specific class Specification Manuals for further information regarding construction of roll cage. [Click Here](#)

SECTION 3 – Construction and SSA General Rulings

18. PRESENTATION (14/09/19)

All body work, including any subsequent damage repairs on race nights shall be to a quality tradesman like standard and must permit the race car to be presented in an aesthetically pleasing appearance in as near to original condition as possible.

Paint work and sign writing are to be neat, legible and distinguishable.

- a) All vehicles may display the identification number as issued by their member Club. The number is to be displayed on both sides of car and on roof turret.
- b) Club prefix, if required, is to precede number and is to be visible from front and rear of car to assist Pit and Dummy grid marshals.
- c) The name of driver will appear on windscreen visor or above driver's door window aperture in legible font letters 75mm high minimum.
- d) To assist with forming up on the race track – the registered number is to be placed on the rear of the car in the right hand rear tail light area – number to be minimum 100mm high.
- e) **Roof Number Plate** - Use of a roof plate is **mandatory** for all race meetings, State and National Titles. It shall be a metal plate, 300mm square with a 50mm right angle fold at the bottom, where two holes at 200mm centres shall be drilled to take 6mm bolts. The number on the plate shall be painted using a black background and white number/s. Number to be a minimum of 250mm high in block font. A triangular three-sided roof number plate is optional, plate to be 300mmx300mmx300mm. Black background with white number.

19. CONSTRUCTION

- Workmanship on race cars is to be of a professional standard.
- All material being used should be of a good quality.
- All material sizes quoted are a minimum unless a maximum is stated.
- Bolts are not to be used through structural tubing in the roll cage cabin area unless a welded sleeve is provided.
- No pop rivets in roll cage tubing.
- No TEK Screws or self-tappers are to be used.

GLOSSARY OF TERMS & DEFINITIONS.

Material:

CHS - Circular Hollow Section.

FMS - Flat Mild Steel

RHS - Rectangular Hollow Section.

W.T - Wall thickness.

O.D - Outer Diameter

OEM - Original Equipment Manufacture; used to indicate parts used, or the complete vehicle as it left the production line from the original manufacturer and means for make and model unless otherwise stated.

CARBURETTOR - Is to have all working parts in use, e.g. needle and seat, fuel bowl, float, jets etc and fuel is to be naturally delivered to the main jet by atmospheric pressure. The air pressure in the carburettor venturi being lower than atmospheric pressure, allows fuel then to flow from the bowl to the carburettor venturi as the pressure in the carburettor throat decreases.



Fuel is then drawn down the venturi and carburettor throat by vacuum provided by the rotation of the engine.

Carburettors that are of different configuration than that of the above must be submitted to the Class Technical Advisory Committee (CTAC) for permission to be used. A complete description must accompany the submission to substantiate a request.

PROPRIETARY – (of a product) marketed under and protected by a registered trade name. (01/07/17)

20. SSA GENERAL RULINGS

- a. **Transponders** - are to be fitted a maximum of 450mm forward of the front axle centreline.
- b. **One Way Communicators** - are **mandatory** for all race meetings. Radio Telemetry or any form of wireless communication to and from a race car is not permitted by unauthorised personnel.
- c. **ENGINE SEALING** - Engine Sealing is **Compulsory** (exception National 4)

SEAL IDENTIFICATION LOCATION AND TAG COLOURS

SSA Inc stamped and numbered seals to be placed on the engine in the following position's (16/09/17)

Engine ID tag to be attached to timing cover seal using wire looped through engine seal. (01/07/17)

Modified Sedan- 1 x sump, 1 x timing cover, 1 **Blue** class ID tag

Production Sedan- 1 x sump, 1 x timing cover, 1 x each Cylinder Head on EFI engines, 1 **Green** class ID tag

Street Stock- 1 x sump, 1 x timing cover, 1 x Cylinder Head, 1 x each Cylinder Head on EFI engines, 1 **Red** class ID tag

Junior Sedan- 1 x sump, 1 x timing cover, 1 x Cylinder Head, 1 **Orange** class ID tag (01/07/17)

National 4 - No engine seals required.

Note – if an engine complies with a lesser specification it may be used in a higher class using the lesser specification class ID tag.

Example – an engine built for Street Stock and tagged with a Red ID tag can be used in Production Sedan or Modified Sedan racing with no further inspection or ID tagging required. (16/09/17)

Replacing a Broken / Lost Seal – other existing seals must be in place and intact on the engine to ensure no engine work has been undertaken since seals were fitted. Contact your local engine sealer. (01/07/18)

d. **DUAL REGISTERED CARS**

Dual registration is permitted – cars must fully meet the specification of any class it is registered in whilst competing and is an approved model for the class. (16/09/17)

Note – dual registered cars can only compete in one class at any one race meeting.

Summary of Updates

Effective 01/07/16

Page 2 – Section 1.1 – Interpretation

Page 2 – Section 1.4 – Registration



Page 9 – Section 3.19 – SSA General Rulings

Effective 01/07/17

Page 2 – Section 1.1 - Interpretation

Page 2 – Section 1.2 - General

Page 3 – Section 1.4 – Registration/Race Day Requirements

Page 4 – Section 2.11 – Seat Belts

Page 7 – Section 2.17 - Seat

Page 9 – Section 3.18 – Definitions - Construction – addition of definition of Proprietary

Page 9 – Section 3.19 – Engine Sealing – placement of ID tag

Effective 16/09/17

Cover – updated of logo and addition of Version and Issue Date

Page 3 - Section 1 – update of dual registration

Page 4 – Section 1 – update of Racing Rules publication name

Page 6 – Section 2.11 – addition of seat belt tag options – including photo

Page 7 – Section 2.14 – Window Net – must meet SFI 27.1

Page 8 – Section 2.17 – Seat – Items 12 and Item 13 – seat frame mount material

Page 10 – Section 3 – d) Engine Sealing

Page 10 – Section 3 – e) Dual Registration

Effective 01/07/18

Page 2 – Section 1.2 – General – updated wording

Page 3 – Section 1.4 – Registration/Race Day Requirements – p) Race Day Work Orders

Page 5 – Section 2.11 – Seat Belts – g) Addition of Option 4 and Option 5

Page 6 – Section 2.11 – Seat Belts – i) Minimum size bolts to mount seat belts

Page 8 – Section 2.14 – Window Net - to be in good condition

Page 8 – Section 2.17 – Seat – no alterations to be made to fit

Page 9 – Section 2.17 – Seat – j) 40mm body washers to be 'steel'

Page 11 – Section 3 – d) Engine Sealing – replacing broken/lost seal

Effective 16/09/18

Page 3 – Section 1.4 – Registration/Race Day Requirements – g) Re-registration requirements

Effective 24/11/18

Page 2 – Section 1 – Interpretation – removal of the need for an Infringement Card

Effective 01/07/19

Page 10 – Section 17 – Seat – seat mounting sleeve detail drawing

Page 11 – Section 17 – Seat – Mounting methods for seat

Effective 14/09/19

Page 3 – Section 4 – Item k) – change to log book page numbering

Page 5 – Section 11 – Seat Belts – item c) – expiry date included

Page 5 – Section 11 – Seat Belts – inclusion of sample SFI identification tags

Page 8 – Section 14 - Window Net – update on manufacture and expiry date identification

Page 8 – Section 14 – Window Net Fitment – separation from general Window Net information

Page 10 – Section 17 – Seat – e) inclusion of Ultra Shield brand seats

Page 10 – Section 17 – Seat – j) update to wording regarding body washers

Page 10 – Section 17 – Seat – o) update to types of body washers permitted

Page 12 – Section 18 – Presentation – duplication of section from Class Tech books and relocation of information regarding Roof Number Plates

Effective 16/11/19

Page 8 – Section 14 – Window Net – updated FIA approval number J253.11



Effective 01/07/2020

All class specification books have been updated with a list of items to be found in the Class Technical Manual with a hyperlink to the appropriate place on the web page.

Page 2 to 5 – Section 1 Sub Sections 1 - 8 – Interpretation, General, Declaration of Compliance, Registration/Race Day Requirements, Measuring of Cars, Penalties, Authority to Exclude, Specification Manuals – updated to reflect current policies, processes and requirements.

Page 5 – Section 2 – Sub Section 9 b) – non compliant race wear withheld and not collected at completion of race meeting will be deemed to be disposed of after 7 days.

Page 6 – Section 2 - Sub Section 11 e) and f) – inclusion of 38x2.6mm CDS tube for seat mounting material.

Page 9 – Section 2 - Sub Section 14 – Window Nets – e) to be replaced as per attached SFI tag expiry date and g) FIA window nets have no expiry date – item b) is to be applied.

Page 9 – Section 2 – Sub Section 14 – Window Net Fitment – d) Window net to be completely removable without the use of tools.

Page 11 – Section 2 – Sub Section 17 – Seat – item l) removed the wording “not to be attached to the floor pan’

